

BISCUITS & GRAVY

Designed by Elise Lea for RK
www.robertkaufman.com

Featuring **KONA**[®]
cotton solids



2025
KONA[®]
cotton solids
365
CALENDAR
QUILT

Finished quilt measures: 58" x 66"















Difficulty Rating: **Intermediate**

ROBERTKAUFMAN
F A B R I C S

For questions about this pattern, please email Patterns@RobertKaufman.com.

Fabric and Supplies Needed

Fabric amounts based on yardage that is 42" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	K001-1387 WHITE	5/8 yard		H	K001-499 SCONE	1/4 yard
	B	K001-1287 PFD BLEACH WHITE	1/2 yard		I	K001-1386 WHEAT	1/4 yard
	C	K001-1037 BONE	1/2 yard		J	K001-492 LATTE	1/4 yard
	D	K001-1339 SNOW	1/2 yard		K	K001-1473 BISCUIT	1/4 yard
	E	K001-1242 NATURAL	1-3/8 yards		L	K001-1017 BISON	1/4 yard
	F	K001-1181 IVORY	1-1/8 yards		M	K001-1851 OTTER	1/4 yard
	G	K001-413 PARCHMENT	3/8 yard		Binding*	K001-413 PARCHMENT <i>*Also used for Fabric G</i>	1/2 yard
Copyright 2024, Robert Kaufman For individual use only - Not for resale				You will also need: 3-2/3 yards for backing			

Notes Before You Begin

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Right sides together has been abbreviated to RST.
- Remember to measure twice and cut once!

Cutting Instructions

From Fabric A, cut:

twelve 1-1/2" x WOF strips

From each of Fabrics B-D, cut:

two 3" x WOF strips. Subcut:

twenty-eight 3" squares

four 2-1/2" x WOF strips. Subcut:

fifty-six 2-1/2" squares

From Fabric E, cut:

six 4-1/2" x WOF strips. Sew the strips together end-to-end, then subcut:

two 4-1/2" x 58-1/2" side borders

two 4-1/2" x 58-1/2" top/bottom borders

twelve 1-1/2" x WOF strips

From Fabric F, cut:

thirty-six 1" x WOF strips. Subcut:

two 1" x 17" rectangles

ninety-six 1" x 7-1/2" rectangles

ninety-eight 1" x 6-1/2" rectangles

From Fabric G, cut:

three 1-1/2" x WOF strips

Subcut one 1-1/2" x 17" rectangle

Note: two strips will remain full WOF for the strip sets.

eight 1" x WOF strips

From each of Fabrics H and M, cut:

one 3" x WOF strip. Subcut:

fourteen 3" squares

one 2-1/2" x WOF strip. Subcut:

seven 2-1/2" squares

From each of Fabrics I-J, cut:

two 3" x WOF strips. Subcut:

sixteen 3" squares

Trim the remainder of the second strip to 2-1/2", then subcut:

eight 2-1/2" squares

From each of Fabrics K-L, cut:

one 3" x WOF strip. Subcut:

twelve 3" squares

one 2-1/2" x WOF strip. Subcut:

six 2-1/2" squares

From the Binding Fabric, cut:

seven 2-1/2" x WOF strips.

Assemble the Half-Square Triangles (HSTs)

Step 1: Pair a 3" Fabric B square with a 3" Fabric J square, RST. Mark a diagonal line on the wrong side of one square. Sew 1/4" away from both sides of the marked line. Cut on the marked line creating two half-square triangles (HSTs). Press toward the darker fabric. Trim to 2-1/2" square. Repeat to make thirty-two B/J HSTs.



thirty-two
B/J HSTs

Step 2: Repeat Step 1 to make:




twenty-four
B/L HSTs



thirty-two
C/I HSTs



twenty-four
C/K HSTs




twenty-eight
D/H HSTs



twenty-eight
D/M HSTs

Assemble the Blocks


Step 3: Arrange four B/J HSTs, four 2-1/2" Fabric B squares, and one 2-1/2" Fabric J square in three rows of three as shown. Sew the squares and HSTs together to form rows, then press. Sew the rows together to form rows, then press. Make eight B/J Blocks.




Step 4: Arrange four B/L HSTs, four 2-1/2" Fabric B squares, and one 2-1/2" Fabric L square in three rows of three as shown. Sew the squares and HSTs together to form rows, then press. Sew the rows together to form rows, then press. Make six B/L Blocks.




Step 5: Arrange four C/I HSTs, four 2-1/2" Fabric C squares, and one 2-1/2" Fabric I square in three rows of three as shown. Sew the squares and HSTs together to form rows, then press. Sew the rows together to form rows, then press. Make eight C/I Blocks.



Step 6: Arrange four C/K HSTs, four 2-1/2" Fabric C squares, and one 2-1/2" Fabric K square in three rows of three as shown. Sew the squares and HSTs together to form rows, then press. Sew the rows together to form rows, then press. Make six C/K Blocks.



Step 7: Arrange four D/H HSTs, four 2-1/2" Fabric D squares, and one 2-1/2" Fabric H square in three rows of three as shown. Sew the squares and HSTs together to form rows, then press. Sew the rows together to form rows, then press. Make seven D/H Blocks.




Step 8: Arrange four D/M HSTs, four 2-1/2" Fabric D squares, and one 2-1/2" Fabric M square in three rows of three as shown. Sew the squares and HSTs together to form rows, then press. Sew the rows together to form rows, then press. Make seven D/M Blocks.



Assemble the Sashing Strips


Step 9: Sew three 1-1/2" x WOF Fabric A strips, three 1-1/2" x WOF Fabric E strips, and two 1" x WOF Fabric G strips together lengthwise. Make note of the fabric placement in the diagram below. Press all seams in one direction. Make two strip sets. Cut a total of forty-eight 1-1/2" wide x 7-1/2" tall strip segments from the strip sets.

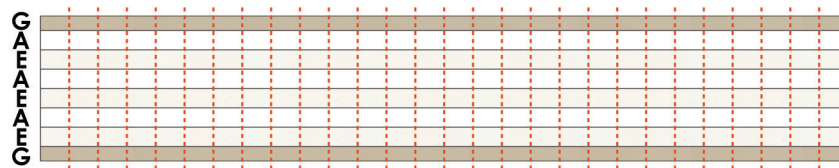


Step 10: Sew a 1" x 7-1/2" Fabric F rectangle to the top and bottom edges of a Step 9 strip segment. Repeat to add strips to each of the forty-eight strip segments from Step 9. Press seams towards the top and bottom edges.




Step 11: Sew a 1-1/2" x WOF Fabric G strip between two 1" x WOF Fabric G strips. Press the seams away from the center. Make two strip sets. Cut a total of fifty-six 1-1/2" wide x 2-1/2" tall strip segments from the strip sets.




Step 12: Sew a 1-1/2" x 17" Fabric G rectangle between two 1" x 17" Fabric F rectangles. Press the seams towards the center. Cut a total of sixteen 1" wide x 2 1/2" tall strip segments from the strip set.



Step 13: Sew six Step 10 units, seven Step 11 strip segments, and two Step 12 strip segments together as shown. Press the seams towards the cornerstones. Make eight horizontal sashing strips.

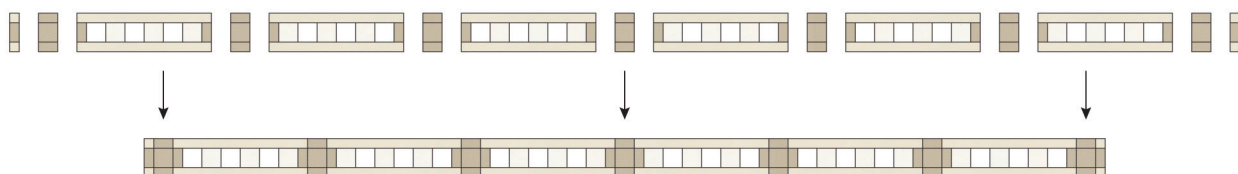

Step 14: Sew three 1-1/2" x WOF Fabric A strips and three 1-1/2" x WOF Fabric E strips together lengthwise. Notice how the fabrics alternate across the strip set. Press all seams in one direction. Make two strip sets. Cut a total of forty-nine 1-1/2" wide x 6-1/2" tall strip segments from the strip sets.



Step 15: Sew a 1" x 6-1/2" Fabric F rectangle to the top and bottom edges of a Step 14 strip segment. Press the seams toward the top and bottom edges. Repeat to add strips to each of the forty-nine strip segments from Step 14. These are the vertical sashing strips.



Assemble the Quilt

Step 16: Arrange the blocks into seven rows of six blocks. Note the fabric placement in the Quilt Assembly Diagram.

Step 17: Place a vertical sashing strip created in Step 15 in between each of the blocks.

Step 18: Sew the blocks and vertical sashing strips together to form rows. Press the seams towards the sashing strips.

Step 19: Place a horizontal strip between each of the rows and at the top and bottom of the quilt center.

Step 20: Sew the rows together to form the quilt center. Press the row seams towards the sashing strips.



Step 21: Sew the side borders to the sides of the quilt center. Press toward the borders. Sew the top and bottom borders to the quilt center. Press toward the borders.

Your quilt top is complete! Baste, quilt, bind, and enjoy!

This pattern may be used for personal purposes only and may not be reproduced in any form without the express permission from Robert Kaufman Fabrics. This pattern is not for resale. All patterns, unless otherwise attributed, are © Robert Kaufman Co., Inc. 2005-2024. All rights reserved.